


GSM Specification

Frequency range	900/1800 MHz
Radiation	H-360°, V-30°
Polarization	vertical
Gain	5 dB
VSWR	< 1.8 : 1
Impedance	50 Ω
Power handling	10 W max.

Drawing

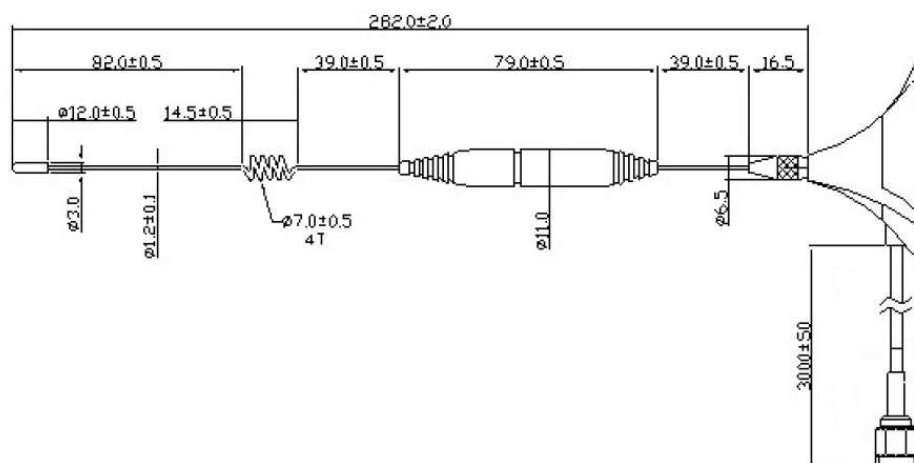

Units: mm

Mechanical Specification

Attachment manner	Magnetic
Available connectors	FME(f), SMA(m), MCX90°(m), MMCX(m)
Cable	RG 174/U, 3 m
Minimal radius for bending	15 mm / 30 mm repetitive
Operating Temperature	- 30 to + 90 °C
Storage temperature	- 40 to + 95 °C
Weight	74 g
Dimension	Ø 40 mm x 282 mm

